




100W Single Output DC-DC Converter

SD-100 series

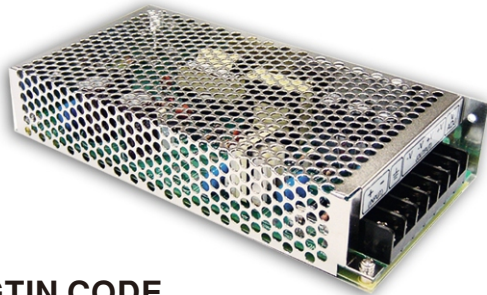

■ Features :

- 2:1 wide input range
- Protections: Short circuit / Overload / Over voltage
- 1500VAC I/O isolation
- Built-in EMI filter, low ripple noise
- Low cost
- High reliability
- 2 years warranty



■ GTIN CODE


MW Search: <https://www.meanwell.com/serviceGTIN.aspx>



SPECIFICATION

MODEL	SD-100A-5	SD-100B-5	SD-100C-5	SD-100D-5	SD-100A-12	SD-100B-12	SD-100C-12	SD-100D-12	SD-100A-24	SD-100B-24	SD-100C-24	SD-100D-24														
OUTPUT	DC VOLTAGE				12V				24V																	
	RATED CURRENT		20A		8.5A				4.2A																	
	CURRENT RANGE		0 ~ 20A		0 ~ 8.5A				0 ~ 4.2A																	
	RATED POWER		100W		102W				100.8W																	
	RIPPLE & NOISE (max.) Note.2		100mVp-p				120mVp-p				150mVp-p															
	VOLTAGE ADJ. RANGE		4.5 ~ 5.5VDC				11 ~ 16VDC				23 ~ 30VDC															
	VOLTAGE TOLERANCE Note.3		±2.0%				±1.0%				±1.0%															
	LINE REGULATION		±0.5%				±0.3%				±0.2%															
	LOAD REGULATION		±0.5%				±0.3%				±0.2%															
	SETUP, RISE TIME		2s, 50ms(only D mode) at full load																							
HOLD UP TIME (Typ.)		20ms(only D mode) at full load																								
INPUT	VOLTAGE RANGE		A:9.5 ~ 18VDC		B:19 ~ 36VDC		C:36 ~ 72VDC		D:72 ~ 144VDC or 85 ~ 132VAC																	
	EFFICIENCY (Typ.)		78%		74%		75%		76%		82%		75%		77%		80%		84%		78%		81%		83%	
	DC CURRENT (Typ.)		9.7A/12V		4.8A/24V		2.4A/48V		1.8A/96V		10.4A/12V		4.8A/24V		2.4A/48V		1.8A/96V		10A/12V		4.8A/24V		2.4A/48V		1.8A/96V	
	INRUSH CURRENT (Typ.)		D:18A/96VDC																							
	LEAKAGE CURRENT		<0.75mA/120VAC(SD-100D)																							
PROTECTION	OVERLOAD		105 ~ 135% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed																							
	OVER VOLTAGE		5.75 ~ 6.75V/10% load				16.8 ~ 20V/10% load				31.5 ~ 37.5V/5% load		31.5 ~ 37.5V/10% load													
ENVIRONMENT	WORKING TEMP.		-15 ~ +60°C(SD-100A), -10 ~ +60°C(SD-100B/C/D) (Refer to "Derating Curve")																							
	WORKING HUMIDITY		20 ~ 90% RH non-condensing																							
	STORAGE TEMP., HUMIDITY		-20 ~ +85°C, 10 ~ 95% RH non-condensing																							
	TEMP. COEFFICIENT		±0.03%/°C (0 ~ 50°C)																							
	VIBRATION		10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes																							
SAFETY & EMC (Note 4)	SAFETY STANDARDS		IEC/BS EN/EN 62368-1(for D type only), EAC TP TC 004 approved, design refer to AS/NZS 62368.1																							
	WITHSTAND VOLTAGE		I/P-O/P:1.5KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC																							
	ISOLATION RESISTANCE		I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH																							
	EMC EMISSION		Compliance to BS EN/EN55032 (CISPR32) Class B, EAC TP TC 020																							
	EMC IMMUNITY		Compliance to BS EN/EN61000-4-2,3,4,6,8, light industry level, EAC TP TC 020																							
OTHERS	MTBF		2600.2K hrs min. Telcordia SR-332 (Bellcore) ; 399.9K hrs min. MIL-HDBK-217F (25°C)																							
	DIMENSION		199*98*38mm (L*W*H)																							
	PACKING		0.65Kg; 20pcs/13.8Kg/0.85CUFT																							
NOTE	<ol style="list-style-type: none"> 1. All parameters NOT specially mentioned are measured at 12,24,48,96VDC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) 5. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx																									

■ Derating Curve

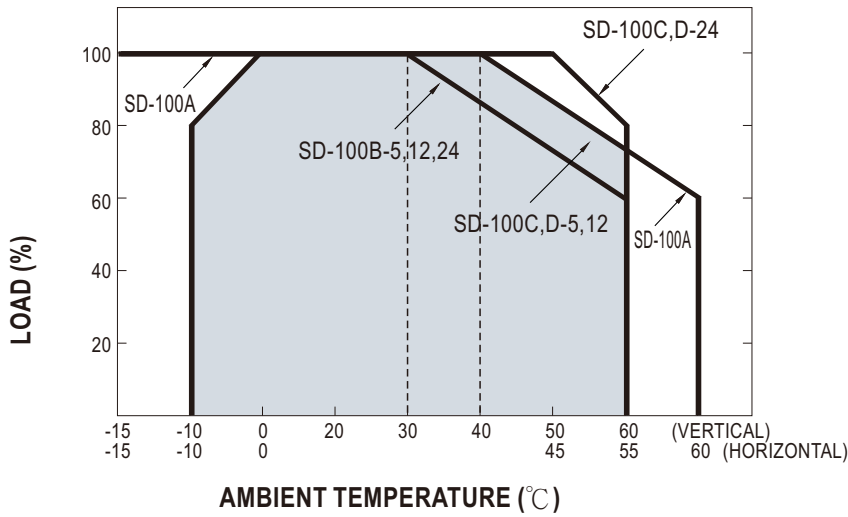

■ Output Derating VS Input Voltage

